


PRODUCT INFORMATION

PROLITE™ LINK is a luminaire in the newly developed PROLITE™ series from SUN-FLEX®. The luminaires are characterized by great flexibility in settings, modern and unique design with amazing light properties.

Using the spring-balanced technology, you can bend and twist the luminaire the way you want to get it perfect for your individual settings. The choice of material and technical components give PROLITE™ LINK superb light qualities with contrast enhancing properties.

Thanks to the LGP technology, exceptionally good light scattering is created, which gives a large lightenhanced surface. The PROLITE™ LINK is possible to dim in three steps and also to adjust in color temperature from warm to colder light

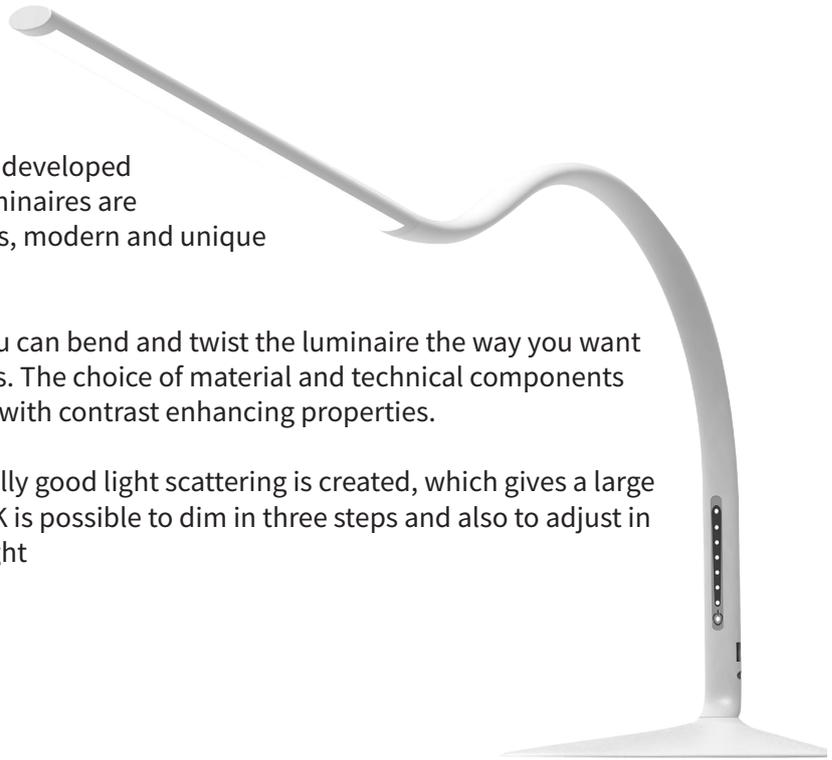

SPECIFICATIONS

- Light source: Samsung LED
- Technology: LGP (Light Guide Panel)
- Color: Black or white
- Consumption: 9 watt
- Brightness (Lux): 1500
- Color temperature (Kelvin) 2700-7000
- Dimmer: 10%, 60%, 100%
- CRI (Color Rendering Index): >90
- USB port: Yes, 2,0 A
- Display with touch functions: Yes
- Glare free: Yes
- Flicker free: Yes
- Adjustment of fixture: Infinite
- Total length of fixture: 995 mm.
- Tablebase, Ø: 230 mm.
- Tableclamp, opening: 50 mm.
- Packaging: Single, transportbox of 6 units.

Art.no.:

- 108200: PROLITE™ LINK, white (GTIN13: 7350042901289)
- 108205: PROLITE™ LINK, black (GTIN13: 7350042901296)



PROLITE™ LINK, black with tablebase



FLICKER-FREE

Has built-in light emitting diodes



The light emitting diodes in this fixture can not be replaced
2015/01/01

Products are shipped with both freestanding tablebase and tableclamp.

Sun-Flex® is a corporation with focus on developing, manufacturing and distribution of products for the modern office workplace. With over 30 years of experience and understanding of the modern office workplace, Sun-Flex™ has gained a respected leadership position in the industry.

Sun-Flex AB
Tegelbruksvägen 1
SE-517 91 Bollebygd, Sweden
Tel +46 322 127 00
Fax +46 322 180 99
info@sun-flex.com
www.sun-flex.com